




Frequency Response	: 55Hz — 19 kHz ±3dB
Sensitivity 1W@1m	: 124 dB SPL Nominal- 141 dB SPL Wideband
Nominal Peak SPL @1m	: 125 to 130dB Peak (for 500 to 1000W RMS Amp.)
HF Dispersion[c]	: 50°to 100°Hor. × 55°Vert. Rotatable Horn, 4 Positions NEXON MH-745 F Voice coil Size 74.5mm.
Directivity	: Q & DI [c] Q:16 Nominal DI:12dB Nominal (f > 1.5kHz)
Crossover Frequencies	: 900Hz Passive
Nominal Impedance	: Passive 8 Ω ; LF 6.2 Ω ,HF 8 Ω.
Recommended Amplifiers	: 500 > to 1000 Watts > into 8 Ω 5
Components	: LF1 × 15" (380mm), 15N3-R, 6.2 Ω drive , 3" Voice coil Neodymium magnet / HF driver Voice Titanium
Height × Width × Depth	: 675 × 434 × 369mm
Weight	: 24kg
Connectors	: 2×NL4MP 4-pole SPEAKON Nuetrik

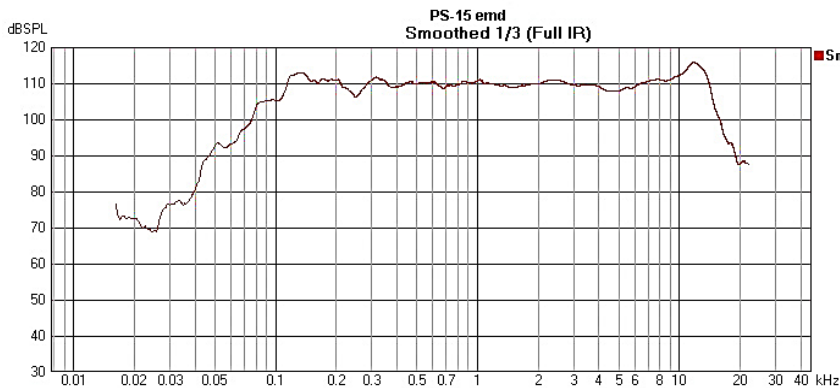

15N3-R

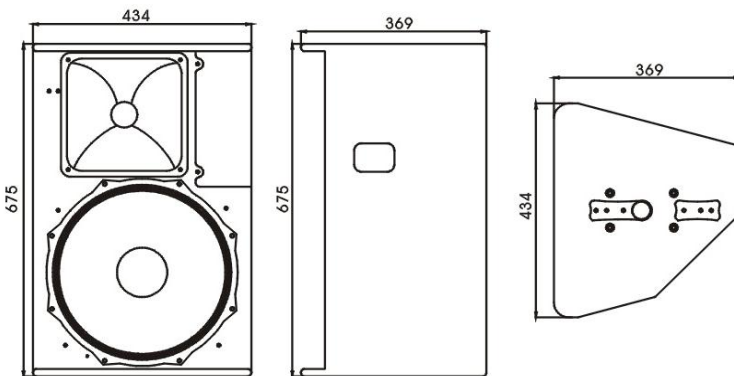

MH-745F




NX-6015



Front



TOP

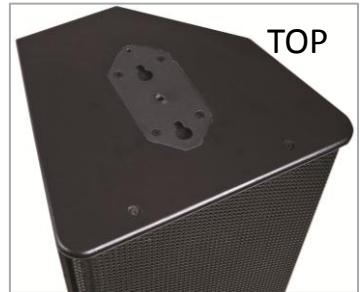

ชุดแขวนป้องกัน



Monitor



ราคา 14,500 / คู่